


# Airofiller<sup>®</sup>

Equipment solutions

## Hygienic Linear Filler

---

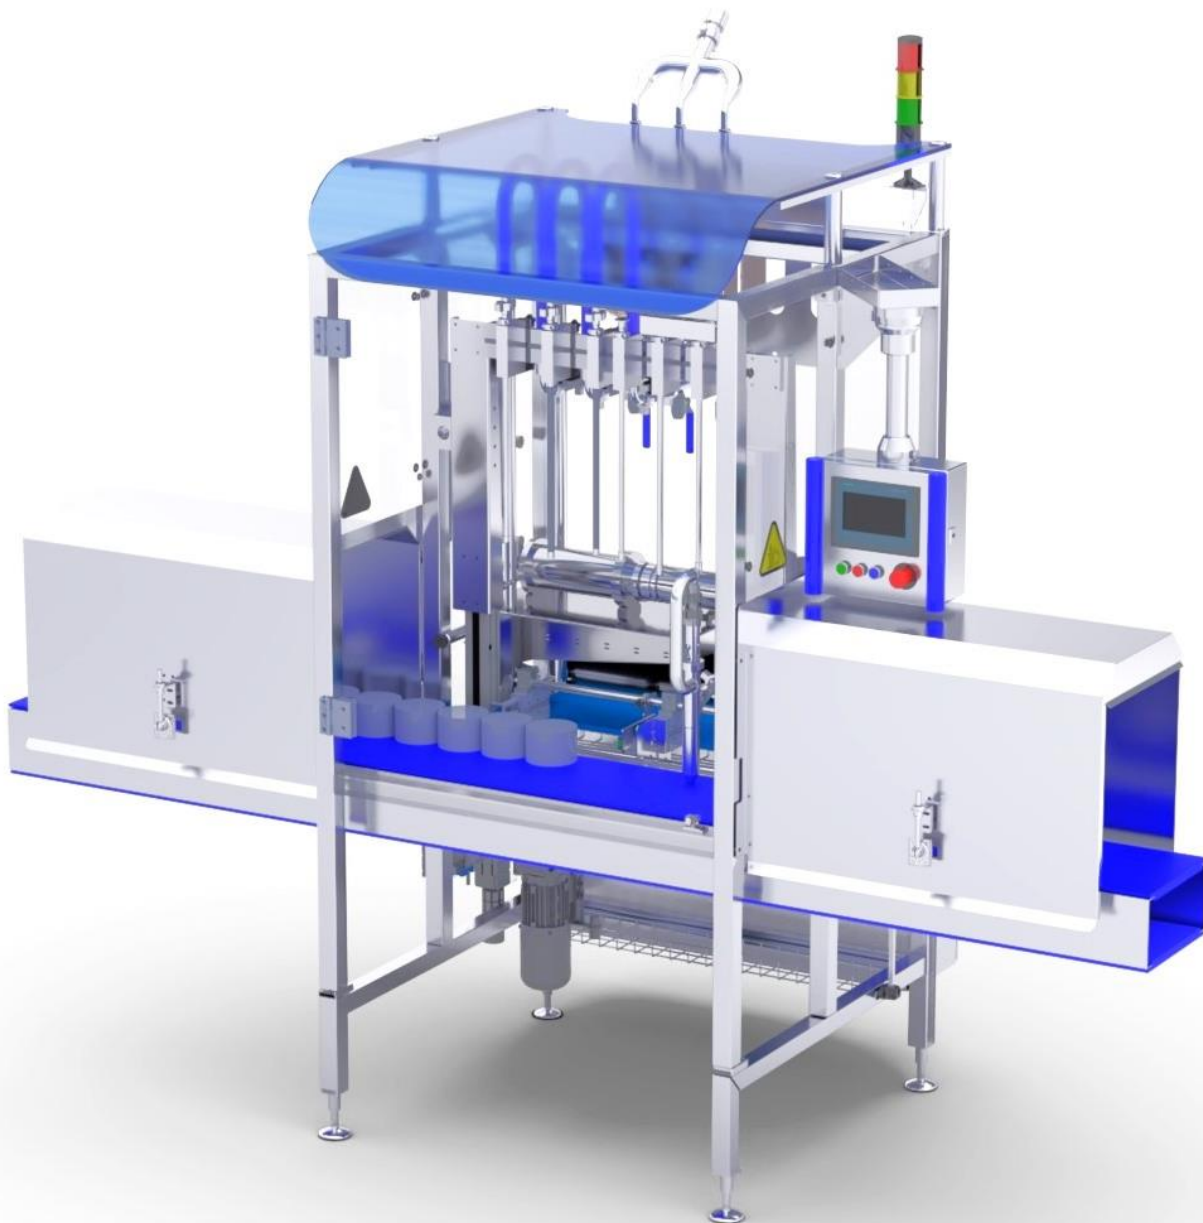

**Airofiller Equipment Solutions BV.**

Dispensing Platform™ / Lab™s / Equipment Solutions™ / Full Service™ / Authorized Filler Network™

---

Bergveste 12, 3992 DE, Houten, The Netherlands  
Tel: +31 (0) 30 220 1176 [www.airofiller.com](http://www.airofiller.com)

## Characteristics

### *Hygienic Linear Filler*

The HLF is our top of the line mass producing solutions for filling bottles.

Machine type	HRFC
Mechanical speed	8-12 pcs/min
Max. power usage	6 kVA
Primary voltage	400/230 V AC
Control	Electric and Pneumatic
Electrical Control	PLC
Extra	User level authentication Internet connection for trouble shooting Multi-language
HMI	7"
Phases	1P + N + PE
Frequency*	50-60 Hz
Min. air pressure	6.5 bar
Max. air pressure	9 bar
Air consumption	1500 dm <sup>3</sup> /min
Machine length*	3000mm
Machine width*	1355mm
Machine height*	2300mm
Weight*	320 kg
Sound production	<85 dB(A)
Frame	Stainless Steel
CE Approved	Yes
Pump	Content Specific
Nozzle	Content Specific

### *Pump / control unit*

---

In standard configuration this HLF filler can be equipped with several pump types serving your specific needs. All are electric driven and dosing volume is measured by flowmeter or revolution counting. On request we can implement pneumatic driven piston pumps, some changes in electric and pneumatic circuits are required.

### *Packages*

---

The HLF is customized in relation to which liquid and packaging are deployed. The packaging length, neck width and cap size being the main leading proportions the machine must be adjusted to. This is all standard procedure.



*Footprint*

